



FEATURED PRODUCTS

VIDEO SURVEILLANCE
NETWORKING
ACCESS CONTROL
FIRE



PACE

Increase the Range of your Security.

Pace1KRT

Single Port SPE Adapter Kit

- Deploy an IP device up to 1000m over a single pair.
- Cost-effective solution for elevator shafts, tunnels, bridges, HVAC, and more..
- Includes Pace1KR Receiver and Pace1KT Transceiver.
- Powered by PoE/PoE+ midspan.



Pace1KRT

Pace2KRT - Dual Port SPE Adapter Kit

- Includes Pace1KR Receiver and Pace2KT Transceiver.

Pace4KR(Q)

4-Port (Managed) SPE Adapter/Switch Kit

- Deploy 4-IP devices up to 1000m over a single pair.
- Powered via 12/24VDC.



Pace1STR

Pace1STR

Long Range Ethernet Adapter Kit

- Deploy IP devices up to 500m over structured cable.
- Includes Pace1PRM Receiver and Pace1ST Transceiver.
- Powered by PoE/PoE+ midspan.
- Multi-port Receivers available with 4, 8 or 16 ports.

Pace16PRM

16-Port Long Range Ethernet Receiver

- Deploy multiple IP devices up to 500m over structured cable.
- Supports up to 16-Pace1ST transceivers for larger installs.
- Powered by PoE/PoE+ midspan.
- 1U rack mount enclosure



Pace16PRM



Deploy T1L Devices over Single Pair Ethernet

for Industrial, BMS, Elevators, HVAC Controllers, Temperature Sensors & More.

Pace1KL

Single Port T1L/SPE Media Adapters

- Deploy 802.3cg, T1L compliant devices 1000m over a single pair.
- Powered by PoE+ midspan.

Pace1KLDC - Version powered via 12/24V (AC/DC)

Pace3KL

3-Port T1L/SPE Media Adapter/Switch

- Deploy 802.3cg, T1L compliant devices 1000m over a single pair.
- Powered by PoE/PoE+ midspan.

Pace3KLC - Version powered via 12/24V (AC/DC)

Pace4KL

4-Port T1L/SPE Media Switch

- Deploy 802.3cg, T1L compliant devices 1000m over a single pair.
- Powered via 12/24VDC.
- Interlink connection to deploy more devices.

Pace1KRL12S

Single Port T1L/SPE & 12V Power Adapter Kit

- Deploy and power 802.3cg, T1L compliant devices 1000m over a single pair.
- Powered by PoE/PoE+ midspan.
- Includes Pace1KR Receiver and Pace1KL12S Transceiver.

Pace1KRL24S

Single Port T1L/SPE & 24V Power Adapter Kit

- Includes Pace1KR Receiver and Pace1KL24S Transceiver.



EXTEND FIBER NET
RANGE



eBridge[™]
PLUS

Upgrade to IP Utilizing Existing Coax Infrastructure, Saving Labor and Increasing Range.

eBridge100STR **EoC Adapter Kit**

- Deploy IP devices over coax up to 300m.
- Includes eBridge100RM Receiver and eBridge100ST Transceiver.
- Powered by PoE/PoE+ midspan.
- Multi-port Receivers available with 4, 8, or 16 ports.



eBridge1600PCRM **16-port EoC Receiver**

- Deploy multiple IP devices over coax up to 300m.
- Supports up to 16-eBridge100ST transceivers for larger installs.
- Powered by PoE/PoE+ midspan.
- 1U rack mount enclosure.



Backup Charging and Redundancy... When Constant Power is not Available...

ReServ24B (EBC24)

Power Supply Transfer Switch with Built-in Rapid Battery Charger (24VDC)

- Provides redundancy and rapid charging of back-up batteries
- Ideal for critical applications where constant power isn't available (switched power) or faster battery charging is required
- Supports two (2) 24VDC power supplies
- Instantaneously transfers from the first, to the secondary power input without delay
- Charges LiFePO4 or SLA (24V) batteries (1A-6A selectable)
- LINQ™ Network Management interface for remote power management



ReServ24B

EBC48

Rapid Battery Charger (48VDC)

- Ideal for remote locations such as parking lots with light poles that only allow for intermittent power, or in critical deployments when longer backup is necessary, if power is lost.
- Integrates with NetWay Spectrum hardened PoE Switches
- Recharges 32AH batteries in under 8 hours (2A or 4A charging circuit)
- Low battery disconnect

*Applications: Supports cameras as well as edge-based PoE access controllers, digital signage, long term backup for extended power outages.
Great alternative to expensive solar deployments*



EBC48

POWER
&
BACKUP



Multi-path Redundant Power for Continuous Operation.

Circ1ATS

High-voltage Automatic AC Transfer Switch (Board)

- Designed to route power from two (2) independent 115VAC or 230VAC primary power mains
- Ensures uninterrupted core system security
- Seamlessly integrates with all Altronix and third-party products that utilize high voltage
- Compact design easily mounts in Altronix wall or rack mount products.



CIRC1ATS

Circ1ATSE

High-voltage Automatic AC Transfer Switch (in Enclosure)

- Compact wall mount design with knockouts to align with power enclosures to route power from two (2) independent 115VAC or 230VAC primary power mains
- Can be wall mounted or mounted to various electric boxes such as a single/double gang box or a 1900 electrical box.



CIRC1ATSE

UNIVERSAL
POWER

Power IP Devices at Remote Locations – & Extend Backup Time when Constant Power is Unavailable

NETWAYSP4TCW53

4-Port Hardened Outdoor Managed 802.3bt PoE Switch with Integral Power

- Supports 802.3bt devices such as IP cameras, illuminators, wireless access points, and more...
- *Includes integrated rapid battery charger (EBC48) for extended backup*
- 4-PoE ports rated up to 90W each (240W total with charger)
- Dual SFP ports (fiber uplink)
- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting
- 115/230VAC input
- Large NEMA 4/4X IP66-11 rated enclosure accommodates four (4) 12VDC/12AH batteries.

NETWAYSP4TCW57 - 277VAC input



NetWaySP4TCW53

NETWAYSP8C3W5

8-Port Hardened Outdoor Managed PoE+ Switch with Integral Power

- Supports IP devices such as cameras, illuminators, wireless access points, and more...
- *Includes integrated rapid battery charger (EBC48) for extended backup*
- 8-PoE+ ports rated up to 30W each or 2-ports rated up to 60W (240W total with charger)
- Dual SFP ports (fiber uplink)
- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.
- 115/230VAC input
- Large NEMA 4/4X IP66-11 rated enclosure accommodates four (4) 12VDC/12AH batteries.

NETWAYSP8C7W7 - 277VAC input



NetWaySP8C3W5



Deploy High-Powered IP Devices at Remote Locations with or without Local Power.

NETWAYSP4BTWP3

4-Port Hardened Outdoor Managed 802.3bt PoE Switches with Integral Power

- Supports IP devices such as IP cameras, illuminators, wireless access points, and more...
- 4-PoE ports rated up to 90W each, 360W total
- Dual SFP ports (fiber uplink)
- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.
- 115/230VAC input
- Built-in battery charging (SLA/LiFePO4)
- NEMA 4/4X IP66-11 rated enclosure.



NETWAYSP4BTWPX3

- NetWaySP4BTWP3 in larger NEMA 4/4X IP66-11 rated enclosure to accommodate batteries.

NETWAYSP4BTWPN

4-Port Hardened Outdoor Managed 802.3bt PoE Switch

- 4-PoE ports rated up to 90W each.
- Dual SFP ports (fiber uplink)
- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.
- Requires 48-56VDC input
- NEMA 4/4X IP66-11 rated enclosure.



Unmanaged versions available.

LOCK1WP Pad Lock for Altronix Outdoor Enclosures



Deploy High-Powered IP Devices at Remote Locations with or without Local Power.

NETWAYSP8BTWPX

8-Port Hardened Outdoor Managed 802.3bt Switches with Integral Power

- Supports the latest IP devices such as IP cameras, illuminators, wireless access points, and more...
- 8-PoE ports rated up to 90W each (360W total)
- Dual SFP ports (fiber uplink)
- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.
- 115/230VAC input
- Built-in battery charging (SLA)
- NEMA 4/4X IP66-11 rated enclosure to accommodate batteries.



NETWAYSPBTWPXN

8-Port Hardened Outdoor Managed 802.3bt Switch

- 8-PoE ports rated up to 90W each
- Dual SFP ports (fiber uplink)
- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.
- Requires 48-56VDC input
- NEMA 4/4X IP66-11 rated enclosure.

Unmanaged versions available.



Deploy IP Devices at Remote Locations with or without Local Power.

NETWAYSP4PX

4-Port Ethernet to Fiber Media Converter with Integral Power

- Provides 240W max per output (480W total), supporting multiple PoE switches.
- Utilizes Hybrid cable or separate Fiber and Copper
- Four (4) SFP ports (fiber uplink).
- Built-in battery charger (*RE2 - optional rack mount battery enclosure*).
- 115VAC/230VAC input via plug-in linecord.
- 1U rack mount enclosure.



NetWaySP4PX

NETWAYSP1H

Ethernet to Fiber Media Converter with Integral Power

- Provides 56VDC/90W supporting a PoE switch.
- Utilizes Hybrid cable or separate Fiber and Copper
- Single SFP port (fiber uplink).
- 115VAC/230VAC input via plug-in linecord.



NetWaySP1H

Deploy 802.3bt IP Devices at Remote Locations.

NETWAYS1BT

Single Port 802.3bt PoE Media Converter/Injector

- Converts a single fiber to 1-Ethernet/Data port and 1-Ethernet/PoE port rated at 90W
- Requires 48-56VDC input
- Available in NEMA 4/4X IP66-11 rated enclosure with or without integral power supply/charger

NETWAYS1BT2

- NetWaySP1BT with dual SFP/Fiber ports

NETWAYS2BT

Dual Port 802.3bt PoE Media Converter/Injector

- Converts a single fiber to 2-PoE ports rated at 90W each
- Requires 48-56VDC input
- Available in NEMA 4/4X IP66-11 rated enclosure with or without integral power supply/charger

NETWAYS2BTWP

Outdoor Dual Port 802.3bt PoE Media Converter/Injector

- Converts a single fiber to 2-PoE ports rated at 90W each
- 115/230VAC input
- Built-in battery charging (SLA/LiFePO4)
- NEMA 4/4X IP66-11 rated enclosure





Flexible System Expansion Utilizing PoE.

NETWAY3012PX

PoE Adapter/Converter (12V)

- Provides PoE (25W) and 12VDC (1A) simultaneously - 60W combined.
- Applications including PoE cameras and external microphones, control boards, switching equipment and more...
- Passes 802.3bt PoE (90W) from midspan/endspan.

NETWAY3024PX

PoE Adapter/Converter (24V)

- Provides PoE (25W) and 24VDC (1A) simultaneously



NetWay3012PX

NETWAY5P

5-Port Hardened PoE+ Switch

- Power 4-IP/PoE devices utilizing a single Ethernet cable to the head-end.
- Compact design to streamline installation for any combination of IP access and surveillance devices.
- Powered via 24VDC.

NETWAY5PQ

5-Port Hardened Managed PoE+ Switch

- NetWay5P with embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.

Outdoor versions available with or without integral power.



NetWay5PQ



Power for 802.3bt PoE Devices.

NETWAY5BT

5-Port Hardened 802.3bt PoE Switch

- Power 4-IP/PoE devices utilizing a single Ethernet cable to the head-end.
- Compact design to streamline installation for any combination of IP access and surveillance devices.
- Powered via 24VDC.

NETWAY5BTQ

5-Port Hardened Managed 802.3bt PoE Switch

- NetWay5BT with embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.

NETWAY5BTWP(Q)

Outdoor 5-Port Hardened (Managed) 802.3bt PoE Switch with Integral Power

- Power 4-IP/PoE devices utilizing a single Ethernet cable to the head-end.
- 4-PoE ports rated up to 90W each, 240W total
- 115/230VAC input
- Built-in battery charging (SLA/LiFePO4)
- NEMA 4/4X IP66-11 rated enclosure.

NETWAY5BTWP3

Outdoor 5-Port Hardened 802.3bt PoE Switch with Integral Power

- Same as above with POE360 power supply, providing 360W total



Indoor/Outdoor versions available with or without integral power.



Flexible System Expansion Utilizing PoE.

NETWAY5ES

5-Port Hardened PoE+ Switch

- Power 4-IP/PoE devices utilizing a single Ethernet cable to the head-end.
- Compact design to streamline installation for any combination of IP access and surveillance devices.
- Powered via 802.3bt injector (90W).

NETWAY5ESQ

5-Port Hardened Managed PoE+ Switch

- NetWay5ES with embedded LINQ™ Technology allows for remote device reset, system monitoring, and reporting.

Outdoor versions available with or without integral power.



NetWay5ESQ

NETWAY1BT

Single Port 4PPoE Midspan/Injector

- Provides up to 90W (802.3bt compliant)
- Aux power output
- 115VAC/230VAC input via plug-in linecord.

NETWAY1BTS - Version with PoE shutdown



NetWay1BT

Power for 802.3bt Devices & Peripherals.

NETWAY4BT

4-Port Managed 4PPoE Midspan with Built-in Battery Charger

- Provides up to 90W per port (360W max).

NETWAY8BT

8-Port Managed 4PPoE Midspan with Built-in Battery Charger

- Provides up to 90W per port (480W max).

Features

- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.
- 115VAC/230VAC input via plug-in linecord.
- 1U rack mount enclosure.



NetWay8BT

NETWAY1XBT

Single Port 4PPoE Injector/Adapter

- Provides up to 90W (802.3bt compliant)
- Powered via 24VDC-56VDC
- PoE shutdown
- Compact design, DIN rail mountable



NetWay1XBT



PoE Driven Power Solutions - Save Time & Labor.



Scan here
to view video

Tango1B

PoE Driven Access Control Power Supply/Charger

- Eliminates dedicated AC power circuit, saving time and labor using low-voltage installation and wiring methods.
- Input power 802.3bt (90W) (NetWay1BT, etc...).
- Simultaneously delivers 12VDC and 24VDC.
- Built-in LiFePO4 battery charger.
- Unique stackable design for multi-output power distribution.
- Saves valuable space.

Tango8AP

Multi-Output PoE Driven Access Power Controllers

- Input power 802.3bt (90W) (NetWay1BT, etc...).
- Simultaneously delivers 12VDC and 24VDC.
- 8-fuse protected trigger controlled lock outputs and 8-power outputs.
- Voltage is individually selectable by output.
- Bi-color LEDs indicate 12/24VDC is present.
- Built-in LiFePO4 battery charger.
- Powered by any 802.3bt compliant midspan.
- Includes Tango1B, ACMS8, and PDS8.

Tango8APCB - Version with PTC protected outputs



Tango1B



Tango8AP




Distribute Power for More Locking Devices & Readers, with Less Real Estate.

ACMS12

Multi-port Access Power Controllers

- 12-fuse protected trigger controlled lock outputs.
- Dual power input allows for individually selectable 12VDC and 24VDC outputs.
- Bi-color LEDs indicates 12VDC or 24VDC is present.
- Fire alarm disconnect is selectable by output.
- Unique stackable design saves enclosure space.

ACMS12CB - PTC protected outputs

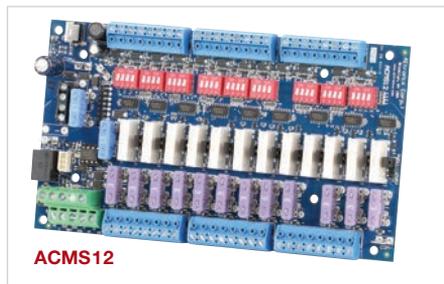


ACMS12

PDS16

Multi-port Power Distribution

- 16-fuse protected power outputs.
- Dual power input allows for individually selectable 12VDC and 24VDC outputs.
- Bi-color LEDs indicates 12VDC or 24VDC is present.
- Unique stackable design saves enclosure space.

PDS16CB - PTC protected outputs

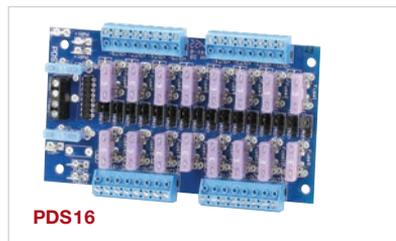

PDS16



Control, Monitor, & Report Power – Increasing System Reliability & Your Bottom Line.

LINQ8PD

Dual Input Network Managed Power Distribution

- Facilitates monitoring, reporting and control of one or 2-AC or supervised DC power supply/chargers.
- Eliminate truck rolls and increase RMR.
- Output voltage is individually selectable for each of the 8-outputs when utilizing 2-power supplies.
- Retrofits with most currently installed multi-output power supply/chargers.
- Battery backup is selectable by output.
- Unique stackable design saves enclosure space.

Network Management Features:

- Provides local and/or remote access to critical information via LAN/WAN.
- Report system diagnostics via dashboard and/or email alert notification
- Local and/or remotely control outputs and reset devices.
- Monitors current, voltage, internal temperature, batteries.
- Programmable voltage and current threshold.
- Programmable time events:
 - Control outputs and power supply via flexible timing parameters.
 - Power cycle mode, Timer Scheduler, FACP override, Battery backup
- Third party certified cybersecurity.
- Individual password protected user levels.
- Event log tracks history.
- Manage and maintain security devices over multiple sites via **Altronix LINQ™ DashBoard.**

LINQ8PCB - PTC protected outputs





Control, Monitor, & Report Power – Increasing System Reliability & Your Bottom Line.

LINQ8ACM

Dual Input Network Managed Access Power Controllers

- 8-programmable Access Control System trigger inputs.
- 8-selectable 12VDC or 24VDC independently controlled fused outputs.
- 8-auxiliary power outputs (unswitched).
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the 8-outputs.
- Eliminate truck rolls and increase RMR.
- Retrofits with most currently installed multi-output power supply/chargers.
- Unique stackable design saves enclosure space.

Network Management Features:

- Provides local and/or remote access to critical information via LAN/WAN.
- Report system diagnostics via dashboard and/or email alert notification
- Local and/or remotely control outputs and reset devices.
- Monitors current, voltage, internal temperature, batteries.
- Programmable voltage and current threshold.
- Programmable time events: Control outputs and power supply via flexible timing parameters.
- Power cycle mode, Timer Scheduler, FACP override, Battery backup.
- Third party certified cybersecurity.
- Individual password protected user levels.
- Event log tracks history.
- Manage and maintain security devices over multiple sites via **Altronix LINQ™ DashBoard.**

LINQ8ACMCB - PTC protected outputs



NETWORK
POWER
MANAGEMENT



Manage and Maintain Security Devices over Multiple Sites.

LINQ-Dashboard (Latest Version - v12)

Remote Power Management for LINQ™ Enabled Products

- Intuitive IP communication software solution to remotely monitor, report, and control any combination of individual or multiple groups of products across any number of locations and systems.
- Provides system diagnostics and/or email alert notifications.
- Monitors current, voltage, internal temperature, batteries, and more.
- Local and/or remotely control outputs and reset devices.
- Monitor virtually an unlimited number of devices.
- Auto detect devices pointed to the Dashboard.
 - Save time by remotely uploading existing or recently deployed IP devices.
- Update the software of multiple devices at one time.
- On screen notifications when devices firmware is outdated.
- Single port used to access remote devices.
- User level(s) and local email server by organization.
- Third party certified cybersecurity.
- Individual password protected user levels.
- List of active users.
- Event log tracks history.






Universal Power with Enhanced Features

EFLOW15UB

Auto-ranging Power Supply/Charger

- Input Voltage: 90-256VAC
- **Selectable output(s):**
 - 12VDC at 14A
 - 24VDC at 10A
- Removable AC input terminal block for maintenance and servicing
- Independent 24VDC charging circuit which will backup both the 12VDC and 24VDC output
- LiFePO4 (Lithium Iron Phosphate) or SLA battery charging
- Fire alarm disconnect
- Short circuit and overvoltage protection
- AC fail, low battery, and battery presence supervision
- Low power disconnect prevents batteries from deep discharge
- LINQ2 interface allows for optional network power management

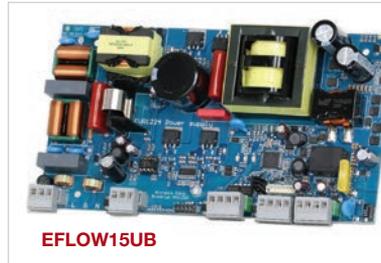

LINQ2

Network Communication Module

- Facilitates monitoring, reporting and control of up to (2) eFlow power supply/chargers
- Includes mounting bracket for quick install on side wall of enclosure

Access and Power Integration Designed for Smaller Installations and Retrofit Applications.

TM250

Compact Access & Power Solution

- Supports a single Altronix power supply/charger and Mercury boards for access systems or up to two (2) EP1501 or MR51e (without power), or a single Salto CU42E0, CU4200, or CU4EB8 controller.
- Ideal for above door, retrofit installations.
- Accommodates a single 12VDC/4AH battery.



TM400

Customizable Access & Power Solution

- Supports a single Altronix power supply/charger with Altronix sub-assemblies and various Mercury boards.
- Accommodates the following options:
 - 1- Up to three (3) MR50 with one (1) Altronix power supply/charger.
 - 2- One (1) EP1501 or MR51e and one (1) EP4502, EP1502, MR52, MR16IN or MR16OUT with one (1) Altronix power supply/charger.
 - 3- One (1) EP4502, EP1502, MR52, MR16IN or MR16OUT with one (1) Altronix power supply/charger, up to two (2) Altronix sub-assemblies.
- Accommodates up to two (2) 12VDC/7AH batteries.



Boards sold separately.

Access Integration Designed for Smaller Installations and Retrofit Applications.

TC100

Compact Access Solution (Mercury Platform)

- Supports a single Altronix power supply/charger or sub-assembly or a single LP1501 Mercury board (without power) for access systems
- Ideal for above door, retrofit installations.
- Can be wall mounted or mounted to various electric boxes such as a single/double gang box or a 1900 electrical box.
- Accommodates a NetWay single port power adapter



TV150

Compact Access Solution (HID)

- Supports a single HID Aero controller for up to 2-door access systems
- Ideal for above door, retrofit installations.
- Accommodates NetWay power adapter to provide 12VDC and PoE+ (sold separately).





Easily Combine Altronix Power with Controllers from the Leading Access Brands.

Trove Wall Mount Series Pre-wired Access & Power Kits

- Simplifies board layout and wire management, adding consistency to your installations.
- Altronix power and sub-assemblies pre-configured with custom wire assemblies for ease of deployment.
- Supporting Azure, Mercury Platform/LenelS2, Honeywell, Software House, and HID/Aero access controllers.
- Wire management options include high-density slotted adhesive backed duct with covers, or wire magnets to facilitate routing and managing of wires.
- Removable backplanes allow you to configure and test prior to on-site installation, reducing installation time and costs.



Trove Supports the Following Brands:



Support up to 8-Doors with Power from a Single Rack Drawer.

Trove Rack Mount Series

Customized or Pre-wired Access & Power Kits

- Simplifies board layout and wire management, where wall space is limited.
- Accommodates Altronix power distribution with access controllers from the leading brands, or isolate power and controllers in separate rack enclosures.
- Removable backplanes allow you to configure and test prior to on-site installation, reducing installation time and costs.
- Unique 2U rack drawer allows for simple service and maintenance, includes Z-Bracket to facilitate wiring, tamper switch, and cam lock.

T1RSH3F8



Trove1SH1R

Access & Power Rack

Supports up to 8-doors with power for Software House controllers



Trove2M2R

Access & Power Rack

Supports up to 8-doors with power for Mercury platform controllers



Access Controller Boards sold separately.



High-Capacity Access and Power Integration Solutions.

TROVE3MBK3

Maximum Density Access & Power

- Supports up to 24-doors with power or 36-doors without power.
- Each set of brackets accommodate Altronix power, Altronix sub-assemblies and Mercury boards.
- Includes: Trove3 enclosure, TM3B backplane with 36-BR3M angled brackets, along with mounting hardware and accessories.





BR3M2PK - set of brackets

T3MB777K1

Pre-wired 24-Door Access & Power Kit

- Includes factory installed power and sub-assemblies (fused), wire management, and wire assemblies for Mercury controllers.

T3MB777K1D - PTC protected outputs

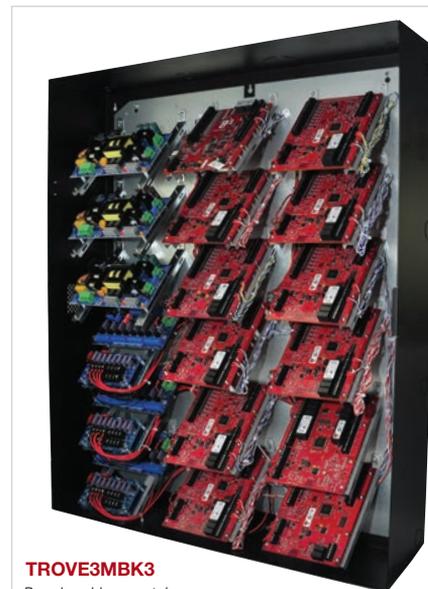

TROVE3MBK3

Boards sold separately.

Matching Wire Trough & Battery Storage.

TROVE2BWC

Battery/Wire Trough (Horizontal Mount)

- Accommodates up to four (4) 12VDC/18AH batteries.
- Designed to mount above or below Trove2 enclosure.

TROVE3BWC

Battery/Wire Trough (Horizontal Mount)

- Accommodates up to four (4) 12VDC/18AH batteries.
- Designed to mount above or below Trove3 enclosure.

TROVE3SWC

Battery/Wire Trough (Vertical Mount)

- Accommodates up to four (4) 12VDC/40AH batteries (shelves included).
- Designed to mount on either side of Trove3 enclosure.

Above models include cam lock and tamper switches.



TROVE3SWC



TROVE3BWC



Providing System Designers Optimum Power Choices, with More Versatility.

MaxFit3FE

Single Voltage Power Options

- 12VDC or 24VDC at 6A max.

MaxFit75FE

Dual Voltage Power Options

- 12VDC at 10A max plus 24VDC at 10A max.

Models available with:

- 12VDC and/or 24VDC outputs with myriad power options.
- Accommodates Altronix power supply/chargers with Altronix sub-assemblies as well as hardened PoE Switches.
- Network power management options
- Compact design houses up to (4) 12VDC/12AH Batteries

MaxFit33FE

Dual Voltage Power Options

- 12/24VDC at 6A max plus 12/24VDC at 6A max.



Customize your power distribution with up to (3) Altronix sub-assemblies.



NAC Power and Notification with all the Bells and Whistles.

FIRESWITCH108

Network Programmable NAC Power Extender

- 24VDC regulated power-limited NAC outputs at 10A max.
- 2.5A max. current per output.
- One (1) dedicated aux. output with battery backup rated at 1A.
- Two (2) configurable inputs trigger via Class A or Class B signal circuits (polarity reversal) or dry contacts.
- Power outputs are programmable as:
 - 8 Class B NAC outputs
 - 4 Class A NAC outputs
 - Aux. power outputs (with or without battery backup)
 - Any combination of the above
- EOL resistor values are programmable by output, saving time and labor costs.
- Sync protocols include Potter/Amseco, Gentex®, System Sensor®, and CooperWheelock®.
- Ethernet port and LCD display facilitate local programming and remote status monitoring.
- Temporal Code 3, Steady Mode, Input to Output Follower Mode.
- Temporal Code 4 for system CO alarms.
- Signal circuit trouble memory - quickly locates intermittent system trouble and eliminates costly and unnecessary service calls.
- Synchronize up to twelve (12) FireSwitch108 units.
- Compatible with 12VDC or 24VDC fire panels.
- Input to output follower mode.
- Embedded **LINQ™ Technology** allows for remote device reset, system monitoring, and reporting.



FireSwitch108



Monitor Activity in any Area... Provide Situational Awareness, while Reducing Risk.

TempoA2 2-Zone Occupancy Alert System

TempoA4 4-Zone Occupancy Alert System

- Continuously monitor normal traffic patterns to provide notifications of unauthorized activity.
- Ideal for single use restrooms/spaces commonly found in retail, hotels, dining, medical facilities, universities, transportation, parks/recreational, etc...
- Activate via deadbolt latch monitor, motion sensor, contacts, and more...
- Provides visual and/or audible, or remote alerts
- Trigger options:
 - Door Sensor/Trigger inputs.
 - Strobe "Steady" Trigger Inputs.
 - Strobe "Flash" Trigger Inputs.
 - "Panic/Emergency" Trigger Inputs.
- Output options:
 - 12VDC/2.5A, 24VDC/1.25A, (30W).
 - Two (2)/Four (4) Strobe Switched Power Outputs.
 - Four (4)/Eight (8) Aux. Power Outputs.
- 24VAC input
- Built-in battery charging
- LCD display simplifies programming.
- Momentary and/or latching events.
- Embedded **LINQ™ Technology** option, allows for remote device reset, system monitoring, and reporting.

TempoA2X / TempoA4X includes transformer and line cord, 115VAC input



TempoA2B (board only)



TempoA4X



Facilitates Local & Remote Programming over the Network.

Tempo724Q

Network Programmable 24/7 Timer


- Ideal for home/building automation security, access, lighting & more!
- 12VDC/24VDC operation or PoE input
- Built-in battery charging (SLA).
- Flash memory protects against loss of programming due to power failure.
- Momentary and/or Latching Events.
- 60 individually programmed daily/weekly events.
- Block programming capacity can accommodate a total of:
 - 420 events per week
 - 30 programmable Holiday dates
 - Automatic compensation for leap year

Embedded LINQ™ Network Management Technology

- Remote programming
- Programmable users
- USB Network programming
- Email and dashboard alerts

Alerts include:

- System Start up
- "First man in" option
- Standard or Daylight Savings Time settings
- Two independent relays
- Two independent relays trigger inputs (Programmed, relay does not change state)*
- LED indicators: PoE input, AUX power input, Battery LED, and Heartbeat (flashing)

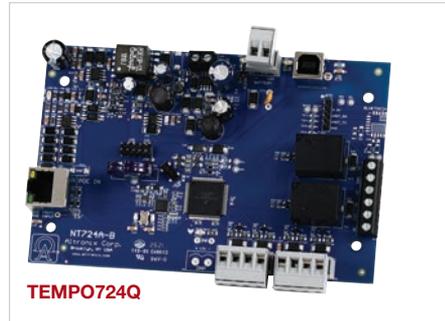

OCCUPANCY
ALERT



YOUR GLOBAL LEADER —
IN POWER & NETWORKING SOLUTIONS.



Altronix[®]

140 58th Street • Brooklyn, NY - USA
info@altronix.com • 718.567.8181